



Portable SSD (PSSD)

PS2012

Spec: 10GB/s

Key Features

Slim & portable

Cross-device ready

Technical Specifications

|                       |                                                |
|-----------------------|------------------------------------------------|
| Interface             | Type-C3.0                                      |
| Interface / Protocol  | 10GB/s                                         |
| Read Speed            | 500MB/s                                        |
| Capacity              | 256GB / 512GB / 1TB / 2TB                      |
| Material              | Aluminum Alloy                                 |
| Dimensions / Weight   | 58.5×58.5×7mm / 37g                            |
| Color                 | Silver, Black                                  |
| Operating System      | Windows, macOS, iOS, Android, HarmonyOS, Linux |
| Operating Temperature | 0°C - 70°C; Storage: -20°C - 80°C              |
| Warranty              | 2 Years                                        |

Typical Applications

Video backup

Cross-device migration

Outdoor mobile office


Phone / laptop expansion

Product View



Product Photo

Measured Performance

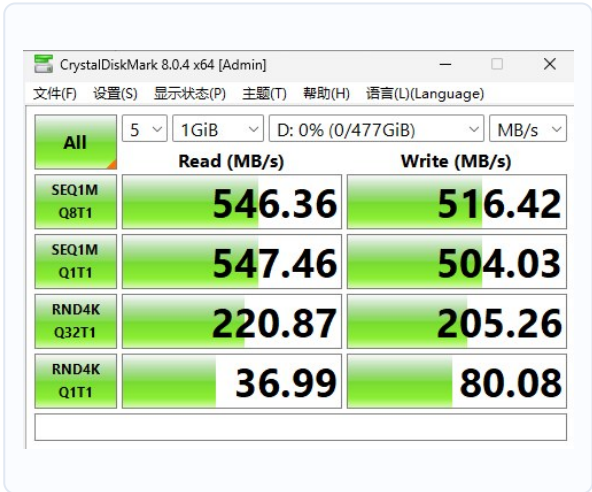

Performance Test Screenshot

OEM / ODM Capabilities

Customization

- Laser / silk-screen logo
- Custom housing color & material
- Capacity & firmware options
- Custom color box / inner packing

Quality Assurance

- ISO 9001 / 14001 / 45001
- IQC and in-process inspection
- 100% functional test before shipment
- Replacement within warranty

Delivery

- MOQ from 100 pcs
- Lead time 30 days
- Sampling / small batch supported
- Drop-shipping & bulk packing

Certification: CE / FCC / RoHS available upon request

Designed for target-market compliance; timeline on request