



Card Reader

RD3012

Spec: dual-slot simultaneous read

Key Features

- High-speed stable transfer
- Direct connection

Technical Specifications

Upstream Port	Type-C3.0
Function	TF/SD
Material	Aluminum Alloy
Dimensions / Weight	58×58×10.1mm / 40g
Color	Silver, Black
Operating System	Windows, macOS, iOS, Android, HarmonyOS, Linux
Operating Temperature	0°C - 70°C; Storage: -20°C - 80°C
Accessories	C-C flat cable(9cm)
Warranty	3 Years

Typical Applications


- Photo / video import
- Drone data export
- Phone / tablet expansion
- Surveillance playback

Product View



Product Photo

Measured Performance

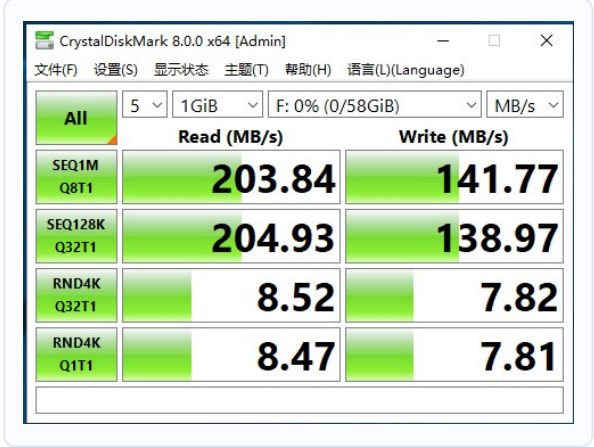

Performance Test Screenshot

OEM / ODM Capabilities

Customization

- Laser / silk-screen logo
- Custom housing color & material
- Capacity & firmware options
- Custom color box / inner packing

Quality Assurance

- ISO 9001 / 14001 / 45001
- IQC and in-process inspection
- 100% functional test before shipment
- Replacement within warranty

Delivery

- MOQ from 500 pcs
- Lead time 30 days
- Sampling / small batch supported
- Drop-shipping & bulk packing

Certification: CE / FCC / RoHS available upon request

Designed for target-market compliance; timeline on request