



Memory Card / microSD

TF-Basic

Spec: SD2.0 SDR50

Key Features

- High endurance
- Wide device compatibility

Technical Specifications

Capacity	4GB / 8GB / 16GB / 32GB
Speed Class	SD2.0 SDR50
Read Speed	25M/s
Interface	MicroSD
Material	Epoxy Resin
Dimensions / Weight	15×11×1mm / 0.230g
Operating System	Windows, macOS, iOS, Android, HarmonyOS, Linux
Operating Temperature	0°C - 70°C; Storage: -20°C - 80°C
Warranty	1 Years

Typical Applications


- Smartphone expansion
- Surveillance recording
- Dash-cam recording
- Drone / action cameras

Product View



Product Photo

Measured Performance

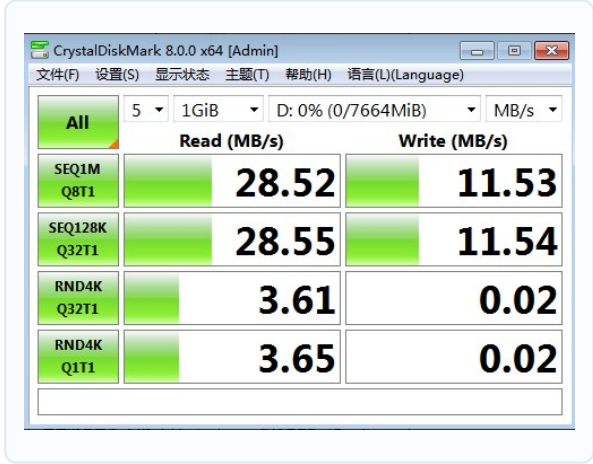

Performance Test Screenshot

OEM / ODM Capabilities

Customization

- Laser / silk-screen logo
- Custom housing color & material
- Capacity & firmware options
- Custom color box / inner packing

Quality Assurance

- ISO 9001 / 14001 / 45001
- IQC and in-process inspection
- 100% functional test before shipment
- Replacement within warranty

Delivery

- MOQ from 100 pcs
- Lead time 15 days
- Sampling / small batch supported
- Drop-shipping & bulk packing

CE · FCC · RoHS

Certified since 2024; renewed in 2026
Copies available on request